


revolutionary products . . .

ENECLAD[®] SuperBond

Better bonding, incredible performance.

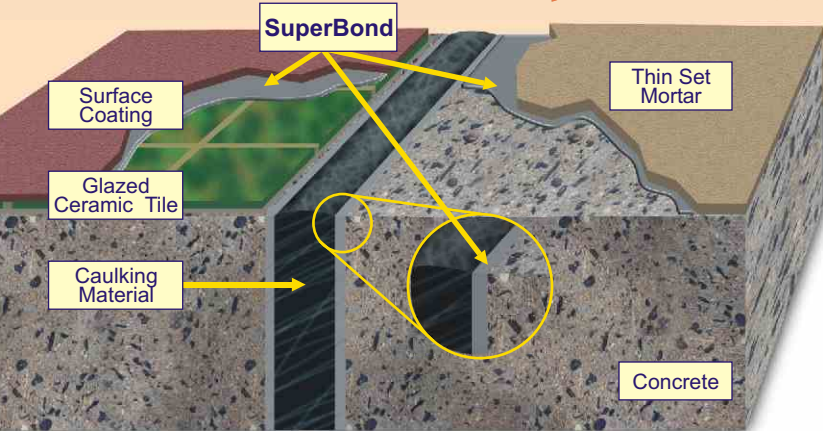

Bonds to problem materials like never before...

- Galvanized surfaces
- Glazed ceramic tile
- **Glass**
- Stainless and aluminum
- **Many More Materials...**

...and, in most environments!

Ultra-High Performance Structural Adhesive. Universal Surface Bonding Agent.


ENECLAD[®] SuperBond is a revolutionary structural adhesive that provides unrivaled performance bonding a new concrete overlay to an existing, cured concrete surface or when bonding synthetic/plastic mortars to virtually any rigid surface. When used to bond new concrete to old, the strength of the resultant bond is many times greater *than that of monolithic concrete!*

SuperBond is a 100% solids, two-component, high performance polymer composite exhibiting **extraordinary adhesion** to concrete, tile, stone, brick, block, terrazzo, marble, metal, wood and even glass! SuperBond is great for improving the adhesion of conventional structural caulking materials used in expansion and control joints.

As a universal bonding agent, SuperBond is ideal as a bond coat for many types of conventional paint systems for surfaces that are traditionally difficult to coat — galvanizing, glazed ceramic tile, glass, stainless steel, and aluminum.

ENECLAD[®] SuperBond can be used in different environments since it is **highly resistant to corrosive and chemical conditions**. SuperBond can even be used as a bonding agent for permanent immersion applications such as in swimming pools or on ships' hulls. It **cures chemically**, transforming the bond-line into a highly durable, waterproof film. The cured film is **impervious to water** (unlike plastic emulsions that can soften and emulsify).

ENECON[®] Corporation is a qualified supplier to the U.S. Department of Defense. We've been supplying high performance polymer composites to the U.S. Navy for many years. ENECLAD[®] SuperBond is a direct result of our on-going research and development efforts to provide **the finest polymer systems** for some of the toughest industrial and commercial applications.

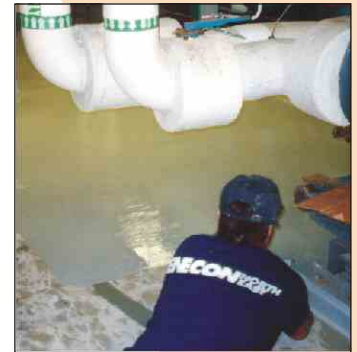

SuperBond is an excellent bonding agent for almost any flooring material.



Dissimilar materials bond easily — and permanently — with SuperBond.



Large scale application to virtually any rigid surface prior to painting.

ENECON[®] Corporation
The Fluid Flow
Systems Specialists.

1-888-4-ENECON

Tel: 516.349.0022 · Fax: 516.349.5522

email: enecon@enecon.com

SuperBond

Physical Properties

Using SuperBond

ENECON[®]

Surface Preparation - ENECLAD[®] SuperBond should only be applied to clean surfaces.

1. Remove all loose material and surface contamination.
2. Clean the substrate with a suitable solvent that leaves no residue on the surface after evaporation such as MEK, acetone, denatured alcohol or isopropyl alcohol.
3. If necessary, apply moderate heat and/or allow ingrained contaminants to leach out before the final solvent cleaning.

Note: Although surface roughening is not required for normal applications, roughening of the surface will increase the adhesion of ENECLAD[®] SuperBond, which may be desirable for certain applications.

Mixing - The individual components of this product should be thoroughly stirred before the two are mixed together. Pour the container of Activator into the Base container. Mix the two components together either manually or mechanically. Blend the material for 1 - 2 minutes. Stop and scrape the container sides and bottom to incorporate any unmixed base or activator. Continue mixing for 2-3 additional minutes.

Application - Apply by stiff brush or short nap roller. ENECLAD[®] SuperBond should be applied at a minimum of 5 mils thick, although rougher substrates will require thicker applications. Stipple the SuperBond into any pits and cavities as necessary.

The ENECLAD[®] SuperBond must be applied within its working time and must be overcoated while tacky, within its maximum overcoat time as follows:

Temperatures	50°F	59°F	77°F	86°F
	10°C	15°C	25°C	30°C
Pot Life	4 hr	90 min.	45 min.	25 min.
Overcoat within	24 hr	14 hr	8 hr	4 hr

Health and Safety - Every effort is made to ensure that ENECON[®] products are as simple and safe to use as possible. Normal industry standards and practices for housekeeping, cleanliness and personal protection should be observed.

Please refer to the detailed MATERIAL SAFETY DATA SHEETS (MSDS) supplied with the material (also available on request) for more information.


Technical Support - The ENECON[®] engineering team is always available to provide technical support and assistance. For guidance on difficult application procedures or for answers to simple questions, call your local ENECON[®] Fluid Flow Systems Specialist or the ENECON[®] Engineering Center.

All information contained herein is based on long term testing in our laboratories as well as practical field experience and is believed to be reliable and accurate. No condition or warranty is given covering the results from use of our products in any particular case, whether the purpose is disclosed or not, and we cannot accept liability if the desired results are not obtained.

Copyright © 2001 by ENECON[®] Corporation. All rights reserved. No part of this work may be reproduced or used in any form or by any means - graphic, electronic or mechanical including photocopying, recording, taping or information storage and retrieval systems - without written permission of ENECON[®] Corporation.

(ASTM D- 4541) Direct Tensile Adhesion to:	Bond Strength (psi)	Failure Mode
*Unblasted Carbon Steel	1500	Stud and panel adhesive failure
*Unblasted Stainless Steel	1400	Stud and panel adhesive failure
*Unblasted Galvanized Steel	800	Panel adhesive failure
*Smooth Plate Glass	1500	Glass cohesive failure
*Unblasted Aluminum	1400	Stud and panel adhesive failure
*Cured Epoxy Coating	1000	Stud, coating and panel adhesive failure
*Glazed Ceramic Tile	700	Tile cohesive failure
Dry Concrete	400	Concrete cohesive failure
Damp Concrete	400	Concrete cohesive failure
*Vinyl Tile	500	Vinyl tile cohesive failure
*Wood	800	Wood cohesive failure

***Substrates were prepared with only an acetone wipe.**

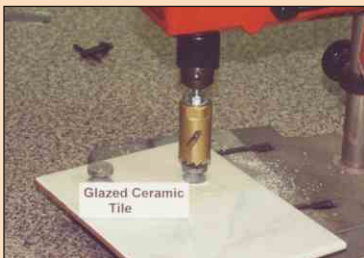

ENECLAD[®] SuperBond creates a strong, durable and *waterproof* seal between cement and mortar, mortar and metal, even mortar and ceramic tile — *the glazed side!*

Your Local ENECON[®] Fluid Flow Systems Specialist